


USING LYSAGHT STEEL PRODUCTS IN COLORBOND® STEEL MATT

This Guide should be read in conjunction with Lysaght PAB07 – General care, safety and handling of LYSAGHT® cladding products

WHAT IS COLORBOND® STEEL MATT

COLORBOND® steel Matt is a new pre-painted finish that delivers a softer, more subtle look. This is achieved with a new paint technology that is designed to diffuse light reflection rather than providing a direct reflection of light.

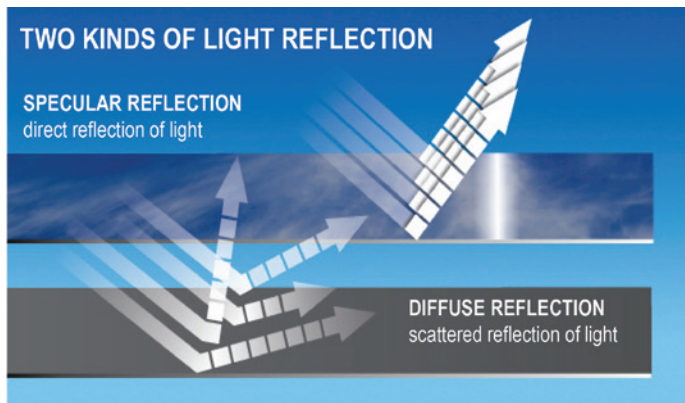

PRODUCT AVAILABILITY

Lysaght offers a comprehensive range of our available profiles in COLORBOND® steel Matt. This range is continually evolving as more feed sizes are being made available by BlueScope.

For current product availability visit www.lysaght.com or contact your Lysaght representative

ORDERING COLORBOND® STEEL MATT – BATCHING

Care should be taken when ordering your project requirements of LYSAGHT® products manufactured from COLORBOND® steel Matt.

Paint systems used for COLORBOND® steel Matt have unique properties and unique appearance. Stringent appearance specifications are used in the manufacture of COLORBOND® steel Matt feed.

For broadsheet cladding supplied to large projects the best practise is to source materials from a single BlueScope production run to ensure a consistent aesthetic is maintained across the roof or wall area to be clad.

Your Lysaght representative can provide further advice on ordering your project requirements.

CARE AND HANDLING

LYSAGHT® roofing and walling products manufactured from COLORBOND® steel Matt should be treated in line with best practise guidelines for all COLORBOND® steel building products.

More detail can be found in BlueScope Technical Bulletins and Lysaght Product Advisory Bulletin 07 - General care, safety and handling of LYSAGHT® cladding products or the Lysaght Design and Installation guide downloadable at www.lysaght.com

STRIPPABLE COATINGS (CORSTRIP®)

To provide temporary protection during production, handling and transport, some COLORBOND® steel Matt products are coated with a strippable plastic film. This coating peels off easily when new, but it has a relatively short life, especially in sunlight. If you don't remove this coating at the time of installation, you may find it very hard to remove later on. Lysaght recommends you remove this coating as soon as practicable and dispose of the plastic in an environmentally responsible manner.

ACCESSORY MATCHING

BlueScope has worked with powdercoat suppliers to identify formulations to provide the best visual match to COLORBOND® steel Matt colours.

COLORBOND® steel Matt colour	DULUX	INTERPON	JOTUN
COLORBOND® steel Basalt® Matt	9067645F-KG Electro Basalt®	DI000 Basalt® Matt GP208A	COLORBOND® steel Basalt® Matt
COLORBOND® steel Monument® Matt	9069171F-KG Electro Monument®	DI1000 Monument® Matt GL229A	COLORBOND® steel Monument® Matt
COLORBOND® steel Dune® Matt	9067645F-KG Electro Dune®	DI000 Dune® Matt GP208A	COLORBOND® steel Dune® Matt
COLORBOND® steel Shale Grey™ Matt	9067645F-KG Electro Shale Grey™	DI000 Shale Grey™ Matt GP208A	COLORBOND® steel Shale Grey™ Matt
COLORBOND® steel Surfmist® Matt	9069171F-KG Electro Surfmist®	DI000 Surfmist® Matt GL229A	COLORBOND® steel Surfmist® Matt

FASTENERS

Given the constraints of the powder coating process and resultant effects on fasteners coating durability BlueScope recommends that existing standard coloured fasteners should be utilised with COLORBOND® steel Matt.

PRODUCT DESCRIPTIONS

All descriptions, specifications, illustrations, drawings, data, dimensions and weights contained in this catalogue, all technical literature and websites containing information from Lysaght are approximations only. They are intended by Lysaght to be a general description for information and identification purposes and do not create a sale by description. Lysaght reserves the right at any time to:

- (a) supply Goods with such minor modifications from its drawings and specifications as it sees fit; and
- (b) alter specifications shown in its promotional literature to reflect changes made after the date of such publication.

DISCLAIMER, WARRANTIES AND LIMITATION OF LIABILITY

This publication is intended to be an aid for all trades and professionals involved with specifying and installing Lysaght products and not to be a substitute for professional judgement.

Terms and conditions of sale available at local Lysaght sales offices.

Except to the extent to which liability may not lawfully be excluded or limited, BlueScope Steel Limited will not be under or incur any liability to you for any direct or indirect loss or damage (including, without limitation, consequential loss or damage such as loss of profit or anticipated profit, loss of use, damage to goodwill and loss due to delay) however caused (including, without limitation, breach of contract, negligence and/or breach of statute), which you may suffer or incur in connection with this publication.

© Copyright BlueScope Steel Limited

WWW.LYSAGHT.COM

Technical enquiries:
steeldirect@bluescopesteel.com or call 1800 641 417

LYSAGHT® is a registered trademarks of BlueScope Steel Limited, ABN 16 000 011 058. The LYSAGHT® range of products is exclusively made by or for BlueScope Steel Limited trading as Lysaght.



LYT0107 02.08.17