


PERMALITE® aluminium LT7® Data Sheet

LT7® PROFILE DIMENSIONS

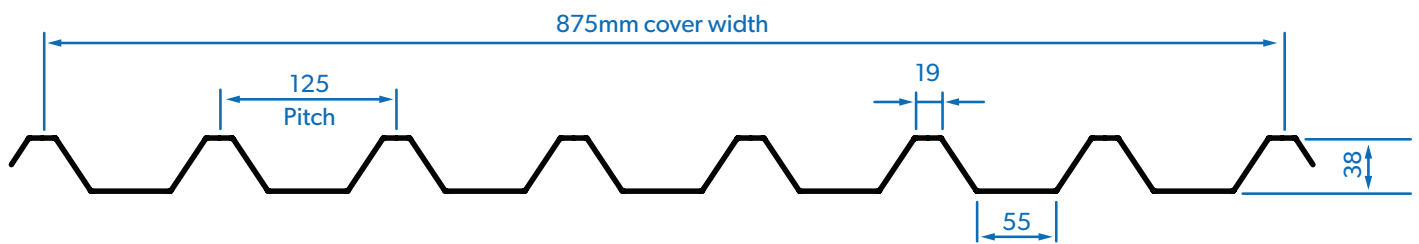

PRODUCT DESCRIPTION & FEATURES

The versatility of LT7® manufactured from PERMALITE® is due to its strength, water-carrying capacity and fixing economy

This strength, combined with its spanning ability, lightness and rigidity permits LT7® to achieve large support spacings to be used with safety and easy on-site handling.

Other features include:


- Can be used for both roofing and walling applications (also reversed for a bold wall effect)
- Available in a wide variety of colours
- May be used in roof pitches as low as 1 degree (1 in 57)
- Spring curve to a radius as low as 18m
- Crimp curve to a radius as low as 0.5m

Thickness Range (BMT):	0.70mm, 0.90mm & 1.2mm
Length Range:	0.85m to 23.0m
Pan Cross Section area:	26,000mm ² /metre sheet width
Tolerances:	Length +0mm, -15mm Width ±4mm
Finishes:	Mill, Stucco Embossed, Painted



COLOUR AVAILABILITY

The following PERMALITE® aluminium standard polyester paint colours are applied to the coiled sheet by reverse roller coating and heat curing on BlueScope paint lines employing the latest painting technology.



Enduro Green®



Glacier White™



Moon Shadow®



Sahara®



Gull Grey™



Slate Grey™



Obelisk Grey®

Other colours/fluorocarbon paints are available upon request and subject to MOQ's.

DESIGN AND INSTALLATION

LT7® manufactured from PERMALITE® limit state wind pressure capacities are based on data in accordance with AS 1562.1:1992 Design and installation of sheet roof and wall cladding: Metal, and AS 4040.1:1992 Methods of testing sheet roof and wall cladding – Resistance to concentrated loads. The wind loadings used in conjunction with these tables are to be determined in accordance with AS/NZS 1170.2:2002 Structural design actions – Wind actions.

These tables and all installation data/details can be found in the Permalite Aluminium Roofing Solutions manual, available for download at www.permalite.lysaght.com

PROFILE PROPERTIES

Thickness (mm)	kg/m ² Cover width (Mill finish)	kg/m Length (Mill finish)	m ² /tonne (Mill finish)	Section Modulus about principal axis (x10 ³ mm ³)		2nd Moment of area about principal axis (x10 ³ mm ⁴)	
				Z _x	Z _y	I _x	I _y
0.70	2.645	2.314	378	8.274	135.9	186.4	63390
0.90	3.401	2.976	294	10.64	174.7	239.7	81500
1.20	4.534	3.967	221	14.18	232.9	319.5	108700

MATERIAL SPECIFICATION

LT7[®] manufactured from PERMALITE[®] is produced from marine grade aluminium 5251 and 5052 H38 temper to AS/NZS 1734:1997 Aluminium and aluminium alloys – Flat sheet, coiled sheet and plate.

CHEMICAL COMPOSITION OF 5251 AND 5052

(% max except where range is given)

Alloy	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others	
									Each	Total
5251	0.40	0.50	0.15	0.10-0.50	1.70-2.40	0.15	0.15	0.15	0.05	0.15
5052	0.25	0.40	0.10	0.10	2.20-2.80	0.15-0.35	0.10	0.15	0.05	0.15

CHARACTERISTICS OF 5251 AND 5052

Corrosion Resistance:	Excellent
Anodising:	Fair (finish cannot be guaranteed to meet the requirements of AS 1231:2000 Aluminium and Aluminium Alloys – Anodised Coatings for Architectural Applications)
Formability:	Very Good
Machinability:	Fair
Weldability:	Very Good
Brazeability:	Poor

ALLOY MECHANICAL PROPERTIES

The following properties are typical of mill finish, unpainted sheet.

Alloy	5251	5052
Temper	H38	H38
Minimum Yield Strength (Mpa)	225	220
Ultimate Tensile Strength (MPa)	260	270
Elongation (0.70 BMT)	3%	3%
Elongation (0.90 BMT)	4%	4%
Elongation (1.20 BMT)	4%	4%

THERMAL PROPERTIES

Coefficient of thermal expansion: 23.9×10^{-6} per °C
(approximately 1.17mm/m over 50°C temperature change).